



Maximum Performance



UH180, UH240, UH280

FEATURES AND BENEFITS

- Freestanding, high spin
- Complete stainless steel cabinet
- Stainless steel drum and tub
- Patented soap hopper
- Large drain valve (Ø 76 mm)
- Easy access to all important parts from all sides
- Large door opening for easy loading & unloading
- Automatic door positioning
- Liquid soaps connection
- Weighing system by 4 cells

OPTIONS

- USB plug (on the side panel)
- Liquid soap pumps
- Water recovery option incl. second drain valve
- Steam heating version
- Water sample tap

- Second display
- Automatic weighing system through 4 weighing cells
- Tilting system : assists operators during loading & unloading


CONTROL

- UniLinc Touch
 - 7" full color touch screen display with swipe function: very intuitive for users
 - user-friendly screen with operating instructions built in as part of the control
 - Complete control content available in 34 languages
 - 20 standard wash programmes, total memory capacity for 99 programmes
 - Automated service reminders remind users to maintenance tasks
 - Water leak detection
 - Slow drain detection
 - Temperature-time verification

BARRIER WASHER-EXTRACTORS

TYPE		UH180	UH240	UH280
INNERDRUM				
Capacity 1:09	kg (lb)	20(44)	27(60)	31(68)
Capacity 1:10	kg (lb)	18(40)	24(53)	28(62)
Volume	litres	180	240	280
Diameter	mm	750	750	750
DRUM SPEED				
Wash	rpm	42	42	42
Extraction	rpm	939	939	914
G-FACTOR		370	370	350
HEATING				
Electricity	kW	12 - 18	18	21,9
Steam	bar	3 - 8	3 - 8	3 - 8
Hot water	°C	90	90	90
Sound pressure level	dB (A)	< 67	< 68	< 70
Water valves connection	BSP	3 x 3/4"	3 x 3/4"	3 x 3/4"
Water pressure	kPa	100-600	100-600	100-600
Rec. water pressure	kPa	300-500	300-500	300-500
Water inlet	l/min	20	20	20
Drain valve	outer Ø mm	76	76	76
Flow amount with drain valve	l/min	210	210	210
Steam valve connection	BSP	1/2"	1/2"	1/2"
Steam pressure	kPa	100-800	100-800	100-800
DIMENSIONS				
Size H×W×D	mm	1455×900×1145	1455×1020×1145	1455×1130×1145
Net weight	kg	430	460	490
TRANSPORT DATA				
Packed H×W×D	mm	1610×1010×1235	1610×1130×1235	1610×1240×1235
Gross weight	kg	485	515	550

TYPE	A	B	C	D	E	F	G	J	L	M	T	U	V	Y
UH180	1025	1127	655	1150	202	1423	1455	277	850	900	312	376	1325	1145
UH240	1025	1127	675	1150	202	1423	1455	277	850	1020	312	496	1325	1145
UH280	1025	1127	670	1150	202	1423	1455	277	850	1130	312	496	1325	1145
							height			width				depth

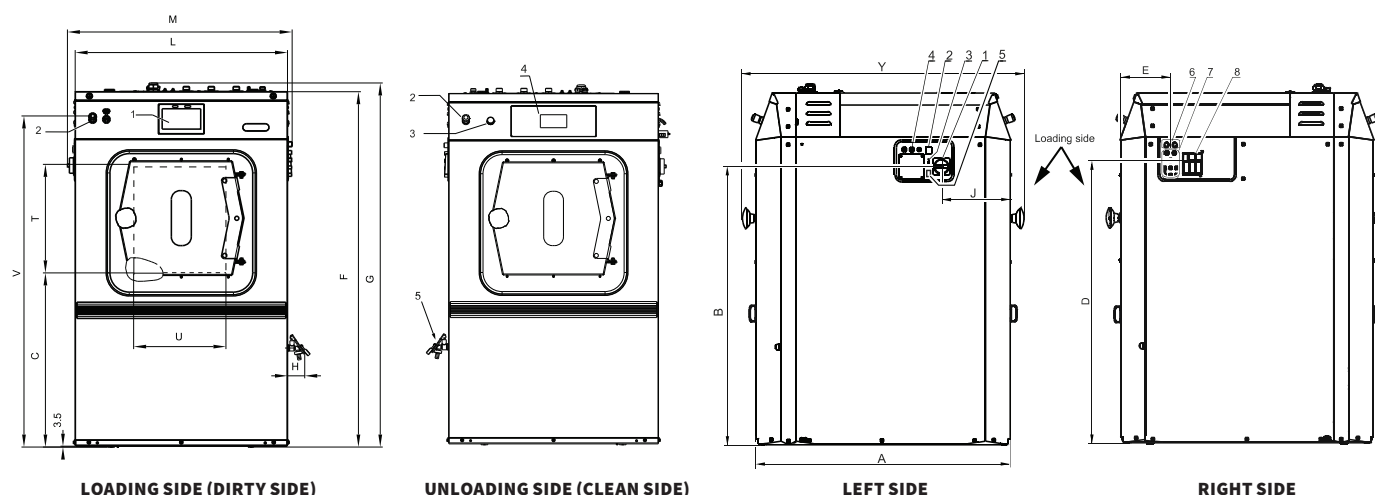

- | | | | |
|---|---|--|--|
| 1. Control panel
2. Emergency stop button "CENTRALSTOP"
3. Signal of machine running | 4. Display on clean side (on request)
5. Water Tap | 1. Main switch
2. Heating change-over switch (electric heating, steam heating), (on request)
3. USB port, (on request)
4. Fuses | 5. PC programming connection (on request)
6. Inlet of water from the recycle (external diameter 0.75 in. [19mm])
7. Air relieve |
|---|---|--|--|

CONSULT YOUR SALES REPRESENTATIVE FOR AVAILABILITY

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications are subject to change without notice. www.unimac.com

UniMac by Alliance Laundry Systems