



Maximum Performance



UB900, UB1100, UB1400, UB1800

FEATURES AND BENEFITS

- Freestanding, high spin
- Stainless steel cabinet
- Stainless steel drum and tub
- Oversized frame, bearings and drum
- Large door opening (765×340 mm) for easy loading and unloading
- Large drain valve (Ø 126 mm)
- Easy access to all parts
- Frequency controlled motor
- Perforated chamber walls: more mechanical action, lower water consumption
- Standard Y-pocket (3 pockets) drum on UB1100, 1400, 1800
- Standard Pullmann (2 pockets) drum on UB900
- Ecological washing programmes – significantly reduces water and electricity consumption
- Patented soap dispenser with 5 removable compartments (UB 1800 – 10 compartments)
- Automatic door positioning

OPTIONS

- Liquid soap pumps
- Drum with 2 pockets on UB1100, 1400, with 3 pockets on UB900
- Tap to take water samples
- Light and sound signalization of end of washer cycle
- Second display
- Insulation for energy, heat and noise reduction





CONTROL

- UniLinc Touch
 - 7" full color touch screen display with swipe function: very intuitive for users
 - user-friendly screen with operating instructions built in as part of the control
 - Complete control content available in 34 languages
 - Automated service reminders remind users to maintenance tasks
 - Water leak detection
 - Slow drain detection
 - Temperature-time verification

BARRIER WASHER-EXTRACTORS

TYPE		UB900	UB1100	UB1400	UB1800
INNERDRUM					
Capacity 1:09	kg (lb)	100 (220)	122 (270)	155,5 (343)	200 (441)
Capacity 1:10	kg (lb)	90 (198)	110 (242)	140 (309)	180 (397)
Volume	litres	900	1100	1400	1800
Diameter	mm	1000	1100	1200	1300
POCKETS					
		Standard 2	Standard 3	Standard 3	Standard
		Optional 3	Optional 2	Optional 2	-
DRUM SPEED					
Wash	rpm	36	35	33	36
Extraction	rpm	800	754	720	695
G-FACTOR					
		360	350	350	350
HEATING					
Electricity	kW	54	72	72	-
Steam	bar	6-8	6-8	6-8	6-8
Hot water	°C	90	90	90	90
Sound pressure level	dB (A)	< 77	< 84	< 80	< 81
Water valves connection	BSP	3× 1,5" / 1× 3/4" 4× 1,5" / 1× 3/4"	3× 1,5" / 1× 3/4" 4× 1,5" / 1× 3/4"	3× 1,5" / 1× 3/4" 4× 1,5" / 1× 3/4"	3× 1,5" / 1× 1" 4× 1,5" / 1× 1"
Water pressure	kPa	100-800	100-800	100-800	100-800
Rec. water pressure	kPa	300-600	300-600	300-600	300-600
Drain valve	outer Ø mm	126	126	126	126
Flow amount with drain valve	l/min	600	600	600	600
Steam valve connection	BSP	1"	1"	1"	1"
Steam pressure	kPa	600-800	600-800	600-800	600-800
DIMENSIONS					
Size H×W×D	mm	1830×2275×1605	1880×2325×1605	2100×2425×1805	2195×2585×1905
Net weight	kg	2810	2990	3550	4990
TRANSPORT DATA					
Packed H×W×D	mm	1985×2355×1740	2080×2400×1740	2250×2485×1940	2265×2665×2040
Gross weight	kg	2970	3150	3760	5310

TYPE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P
UB900	2275	1605	1830	1725	1250	636	750	2200	1500	1160	550	470	560	400	350	500
UB1100	2325	1605	1880	1775	1300	636	800	2250	1500	1190	550	470	560	400	350	500
UB1400	2425	1805	2100	1995	1382	636	900	2350	1700	1200	620	570	560	400	500	600
UB1800	2585	1905	2195	2090	1498	636	900	2510	1800	1255	650	408	1175	400	500	600
	width	depth	height													

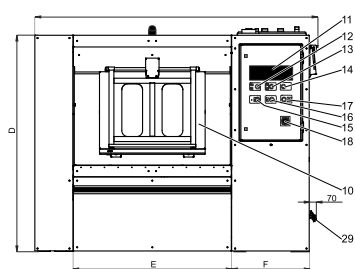

- | | | | |
|-----------------------------|--|--|---|
| 1. Hard cold water inlet | 10. Door of loading (dirty side) | 18. Main switch | 26. Soap hoppers |
| 2. Soft cold water inlet | 11. Programmer | 19. Door of unloading (clean size) | 27. Soft cold water inlet into soap hoppers |
| 3. Hot water inlet | 12. Change-over switch | 20. Signal of loading | 28. Liquid detergent inlet |
| 4. Steam inlet | 13. Signal of machine running (+ operating air pressure) | 21. Centralstop | |
| 5. Supply of pressure air | 14. Centralstop | 22. Button of door locking | |
| 6. Power supply | 15. Button of door unlocking | 23. Button of activation of loading side | |
| 7. Main drainage valve | 16. Button of drum positioning | 24. Button of door unlocking | |
| 8. Recycling drainage valve | 17. Button of door locking | 25. Button of drum positioning | |
| 9. Venting of the machine | | | |

CONSULT YOUR SALES REPRESENTATIVE FOR AVAILABILITY

Alliance Laundry Systems preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding. www.unimac.com

UniMac by Alliance Laundry Systems