

UniMac

Maximum Performance



**MAXIMUM BALANCE OF
RESOURCES. SERIOUS RESULTS.**

UNIMAC.COM


UU SERIES 23-34 KG TUMBLE DRYERS

UU SERIES 23 - 34 KG TUMBLE DRYERS

As the leading manufacturer of on-premises laundry equipment, UniMac® offers more than 7 decades of incomparable quality and long-lasting performance. Our UU series is built with unyielding construction to ensure industrial strength. Our cutting-edge innovations and technologies reduce costs and maximize throughput. And we're constantly improving. It's all part of our commitment to providing the lowest cost of ownership in the industry.

LOWER YOUR COSTS WITH UNIMAC

Drying cycles are usually 30 percent longer than wash cycles. Reducing dry times to match wash times enables you to run your laundry at maximum efficiency. Our dryers are designed for fast drying, while balancing energy costs. With more than 70 years of dryer engineering experience, we have found the perfect balance between drying time and actual Btu usage to conserve energy, maximize throughput and lower labor costs.

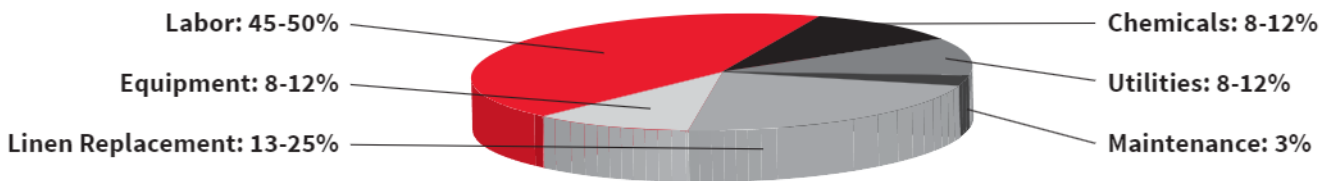

OPTidry®

OVER-DRY PREVENTION TECHNOLOGY

UniMac's optional OPTidry® system takes efficiency further by eliminating costly over-drying. Removing over-drying from your laundry not only reduces utility expenses, but also curbs labor costs and extends linen life, saving up to thousands of dollars annually.



INDUSTRY-LEADING DURABILITY

When it comes to your machine lasting longer and looking good, the difference is in the details. And that's where UniMac shines. Our tumble dryers incorporate a durable cart bumper and kick plate to protect dryer fronts from scratches and dents incurred during the laundering process. Constructed of high-grade steel, our heavy-duty door and two-point hinges will stand up to the toughest laundry conditions.



Proudly based in Ripon, Wisconsin, USA, UniMac is dedicated to research, development and testing to provide equipment that delivers industrial strength and long-lasting quality. Our products undergo a 5-stage product-development process and are pushed beyond their limits in our state-of-the-art test lab to ensure they exceed the toughest demands of the commercial environment and meet our customers' highest standards.

MORE CONTROL OPTIONS



UniLinc®

The industry-exclusive UniLinc® system from UniMac® represents the pinnacle of laundry management.

1. FLEXIBLE OPERATION

UniLinc allows any combination up to 48 auto-dry, moisture-dry and time-dry cycles to be customized using real words instead of codes.

2. EASY TO USE

Get started with the push of just two buttons.

3. MONITOR YOUR LAUNDRY

Record start, stop and idle time between cycles to track the efficiency of your labor.

4. REDUCE DOWNTIME

Receive automatic reminders of daily, weekly and monthly maintenance schedules, while machine errors are recorded by date and time for quick diagnosis and repair.



M SERIES CONTROL

This customizable control allows any combination up to 30 auto-dry and time-dry cycles to be saved, providing easy user interface.



DUAL DIGITAL CONTROL (DDC)

This economy control allows the operator to select the ideal temperature, heating time and cooling time for each use.

C.A.R.E.™

In the unlikely event of a linen fire within the cylinder, our optional Combustion Automated Response Equipped (C.A.R.E.) system, a multiport water manifold system, will saturate the linens in the cylinder. It can also activate an alarm at a remote location.

PEACE OF MIND

UniMac offers a limited warranty for any part of the commercial dryer which fails as a result of a defect in materials or workmanship during the first three years (36 months) after the date of original installation.*

*Parts only, labor not included. See UniMac Warranty Bond for specifics.

23 - 34 KG TUMBLE DRYERS AT A GLANCE

- Multiple-burner heat system provides quick, stable temperature control
- Electrostatically applied paint, available in white or gray
- Self-cleaning lint filter
- Galvanized, precoated steel cylinder
- Embossed-steel front and side panels
- Reversing cylinder option
- Steel cap over top of dryer
- Extended tumble helps prevent wrinkling
- Long-lasting, 22 mm heavy-duty, rubber door gasket
- The UU075 Fast Dry model's boosted energy and airflow deliver 20 percent faster drying



UU SERIES TUMBLE DRYERS 23 - 34 KG

SPECIFICATIONS		UU050	UU055	UU075	UU075 FAST DRY
Control Options		UniLinc®, M Series, DDC	UniLinc®, M Series, DDC	UniLinc®, M Series, DDC	UniLinc®
Dry Weight Capacity - lb (kg)		50 (23)	55 (25)	75 (34)	75 (34)
Cylinder Size - in (mm) (diameter x depth)		37 x 30 (940 x 762)	33 x 35 (838 x 889)	37 x 36 (940 x 914)	37 x 36 (940 x 914)
Cylinder Volume - cu ft (liters)		18.7 (530)	17.3 (490)	22.4 (634)	22.4 (634)
Overall Width - in (mm)		38.5 (980)	34.5 (876)	38.5 (980)	38.5 (980)
Overall Depth - in (mm)		46.8 (1190)	53.1 (1350)	53 (1350)	53 (1350)
Overall Height - in (mm)		77.3 (1960)	66.7 (1700)	77.3 (1960)	77.3 (1960)
Motor - HP (W)	Fan	0.5	0.5	0.5	1.5
	Cylinder	0.5	0.5	0.5	0.5
Air Outlet Diameter - in (mm)		8 (200)	8 (200)	8 (200)	10 (254)
Airflow - cfm		700	700	800	1100 (520)
Water Inlet Size (C.A.R.E.™ System)		(1) 3/4"-11 1/2" NH Hose Connection	(1) 3/4"-11 1/2" NH Hose Connection	(1) 3/4"-11 1/2" NH Hose Connection	(1) 3/4"-11 1/2" NH Hose Connection
Reversing Cylinder		Option	Option	Option	Standard
Plumbing Connection - in (mm)		Gas Models - 0.5 NPT (13) Steam Models - 0.75 NPT (19)	Gas Models - 0.5 NPT (13) Steam Models - N/A	Gas Models - 0.5 NPT (13) Steam Models - 0.75 NPT (19)	Gas Models - 0.75 NPT (19) Steam Models - N/A
Energy Data		Gas Models - 130,000 Btu/hr Steam Models - 113,600 Btu/hr Electric Models - 30kW	Gas Models - 112,000 Btu/hr (32.8 kW) Steam Models - N/A Electric Models - 27 kW	Gas Models - 165,000 Btu/hr (48.3 kW) Steam Models - At 100 psi (6.9 bar): 6.1 BHP, 210,000 Btu/hr (61.6 kW); Recommended operating pressure 80-100 PSIG Electric Models - See below	Gas Models - 225,000 Btu/hr (65.9 kW) Steam Models - N/A Electric Models - N/A
Electrical Specifications - Amps		Gas and Steam Models - B 100-120V/50-60/1 9 X* 200-240V/50-60/1-3 6 N 440-480V/50-60/3 3 P 380-415V/50-60/3 3 Electric Models - E 230-240V/50-60/1 91 F 200-208V/50-60/3 87 G 230-240V/50-60/3 75 H 380V/50-60/3 47 J 400-415V/50-60/3 43 K 440V/50-60/3 41 L 460-480V/50-60/3 38	Gas and Steam Models - B 100-120V/50-60/1 12 X 200-240V/50-60/1/3 7 N 440-480V/50-60/3 3 P 380-415V/50-60/3 3 Electric Models - D 200-208V/50-60/1 133 E 230-240V/50-60/1 116 F 200-208V/50-60/3 78 G 230-240V/50-60/3 67 H 380V/50-60/3 42 J 400-415V/50-60/3 39 K 440V/50-60/3 37 L 460-480V/50-60/3 34	Gas and Steam Models - B 100-120V/50-60/1 12 X 200-240V/50-60/1/3 7 N 440-480V/50-60/3 3 P 380-415V/50-60/3 3 Electric Models - F 200-208V/50-60/3 104 G 230-240V/50-60/3 90 H 380V/50-60/3 56 J 400-415V/50-60/3 52 K 440V/50-60/3 49 L 460-480V/50-60/3 45	Gas Models - N 440-480V/50-60/3 7 P 380-415V/50-60/3 3 Q 200-240V/50-60/3 6 Electric Models - F 200-208V/50-60/3 104 G 230-240V/50-60/3 90 H 380V/50-60/3 56 J 400-415V/50-60/3 52 K 440V/50-60/3 49 L 460-480V/50-60/3 45
Shipping Dimensions Approx - in (mm)	Width	41.5 (1050)	35.5 (900)	41.5 (1050)	41.5 (1050)
	Depth Height	50 (1270) Gas & Electric - 81(2060) Steam - 83.5 (2120)	57 (1450) 70.5 (1790)	56 (1420) Gas & Electric - 81 (2060) Steam - 83.5 (2120)	56 (1420) Gas - 81 (2060)
Net Weight - lb (kg)	Gas & Steam	650 (295), 680 (310)	430 (195), 430 (195)	680 (310), 720 (325)	700 (320)
	Electric	690 (315)	440 (200)	710 (320)	
Standard Shipping Weight - lb (kg)	Gas & Steam	700 (320), 730 (330)	470 (215), 470 (215)	730 (330), 770 (350)	750 (340)
	Electric	740 (335)	480 (220)	760 (340)	
Agency Approvals		CE	CE	CE	CE

*X voltage can be connected to 1 or 3 phase power and operates on 1 phase only.

TO LEARN MORE OR TO FIND A DISTRIBUTOR IN YOUR AREA, VISIT UNIMAC.COM ALLIANCE LAUNDRY SYSTEMS - SHEPARD ST, RIPON, WI 54971 - 1.800.587.5458

Consult your UniMac® distributor for details. For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management systems at Alliance Laundry Systems' Ripon facility have been registered to ISO 9001:2008.