



Maximum Performance



## UUT30, UUT45

### FEATURES AND BENEFITS

- Double capacity on the same footprint
- Easy to use timer
- Gas, electrical and steam heating (UUT30)
- Gas heating (UUT45)
- Large door opening for easy loading and unloading (UUT30 Ø 57 cm, UUT45 Ø 68 cm)
- Galvanized drum
- Axial airflow
- Large lint filter


### OPTIONS

- Stainless steel drum
- Stainless steel front panel
- Full OPL microprocessor
- Residual moisture control:
  - Lower energy and utility costs
  - Lower linen replacement costs


**TUMBLE DRYERS**

TYPE		UUT30	UUT45
<b>CAPACITY</b>			
Capacity	kg/lb	2x13/2x30	2x20/2x45
Drum volume	l	2x300	2x420
Drum diameter	Ø mm	762	838
<b>AIRFLOW</b>			
Airflow	l/s	380	570
<b>DRYING AVERAGE</b>			
Gas heating	g/min	294	385
Electric heating	g/min	258	-
<b>MOTOR</b>			
Fan	kW	2x0,4	2x0,4
Drive	kW	2x0,2	2x0,4
<b>GAS HEATING</b>			
Energy (per drum)	kW	21,4	27,8
Energy (per drum)	kBTU/h	73	95
Electrical connection		1x100-120V/50-60Hz, 1x200-240V/50-60Hz 3x200-240V/50-60Hz, 3x440-480V/50-60Hz, 3x380-415V/50-60Hz	
Gas connection	inch	½"	½"
<b>STEAM HEATING</b>			
High pressure 6,9 bar (per drum)	kW	25,03	-
	kBTU/h	85,4	-
Electrical connection		1x100-120V/50-60Hz, 1x200-240V/50-60Hz 3x200-240V/50-60Hz, 3x440-480V/50-60Hz 3x380-415V/50-60Hz	
Steam connection	inch	¾"	-
<b>ELECTRICAL HEATING</b>			
Energy (per drum)	kW	21	-
Electrical connection		3x200-208V/50-60Hz, 3x230-240V/50-60Hz 3x380V/50-60Hz, 3x400-415V/50-60Hz 3x440V/50-60Hz, 3x460-480V/50-60Hz	
Exhaust	Ø mm	1x200	1x250
<b>DIMENSIONS</b>			
HxWxD	mm	1940x800x1090	2065x875x1235
Net weight (E, G, S)	kg	285, 260, 275	-, 300, -
<b>TRANSPORT DATA</b>			
Packed (foil) HxWxD	mm	2030x830x1190	2160x900x1370
Gross weight (foil E, G, S)	kg	300, 270, 290	-, 320, -
Packed (crate) HxWxD	mm	2210x900x1270	2210x1020x1520
Gross weight (crate E, G, S)	kg	360, 330, 350	-, 400, -

**SIDE UUT30, UUT45**

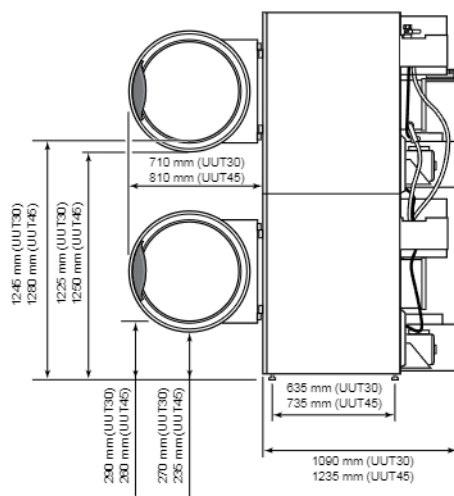

**BACK UUT30, UUT45**

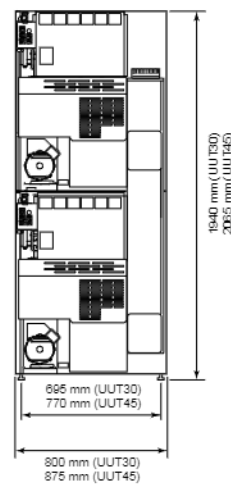

**TO LEARN MORE, OR TO FIND A DISTRIBUTOR IN YOUR AREA, VISIT UNIMAC.COM**  
**ALLIANCE LAUNDRY SYSTEMS - SHEPARD ST, RIPON WI 54971 - +1 800 587 5458**

Consult your UniMac® distributor for details. For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management systems at Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2008.

©2020 Alliance Laundry Systems LLC.

UniMac® by Alliance Laundry Systems