



Maximum Performance



UA180-240-280

FEATURES AND BENEFITS


- Rigid mounted, normal spin, 100G factor
- Stainless steel panels
- Stainless steel drum and tub
- M9 basic control
- Patented soap hopper
- High capacity water inlets (UA280)
- Large drain valve (Ø 76 mm)
- Easy access to all vital parts from the front
- Large door opening for easy loading & unloading

OPTIONS

- 200 G factor execution
- USB plug (on the back panel)
- Liquid soap connection
- Steam heating version
- Liquid soap pumps
- Water recovery kit
- Steam heating version
- Drain pump (UA80)
- 3rd water inlet
- High capacity water inlets UA180, UA240
- ECO version: lower kW rating on request

HIGH EFFICIENT HARDMOUNT INDUSTRIAL WASHER EXTRACTORS

TYPE		UA180	UA240	UA280
INNERDRUM				
Capacity (1:9)	kg/lbs	20 / 44	27 / 60	31 / 68
Capacity (1:10)	kg / lbs	18 / 40	24 / 53	28 / 62
Volume	l	180	240	280
Diameter	mm	750	750	750
DRUM SPEED				
Wash	rpm	42	42	42
Extraction	rpm	490 (100G) - 690 (200G)	490 (100G) - 690 (200G)	490 (100G) - 690 (200G)
G-Factor	G	100 (optional 200)	100 (optional 200)	100 (optional 200)
HEATING				
Electricity very low - low - std - higher - special 1-2-3	kW	----std 12 - higher 18 -----	---std 18-----	-----std 21,9 -----
Steam	bar	1-8	1-8	1-8
Hot water	°C	90	90	90
Sound pressure level	dB (A)	<65	<65	<65
Water valves connection	inch	3/4"	3/4"	3/4"
Water pressure	kPa	100-800	100-800	100-800
Rec. water pressure	kPa	300-500	300-500	300-500
Water inlet	l/min	20	20	20
Drain valve	outer Ø mm	76	76	76
Flow amount with drain valve	l/min	210	210	210
Steam valve connection	inch	1/2"	1/2"	1/2"
Steam pressure	kPa	100-800	100-800	100-800
TRANSPORT DATA				
Gross weight	kg	270 (335 with 200G)	290 (355 with 200G)	305 (385 with 200G)
Net weight	kg	255 (315 with 200G)	275 (330 with 200G)	290 (335 with 200G)
Packed HxWxD	mm	1550 x 925 x 970	1550 x 925 x 1130	1550 x 925 x 1190

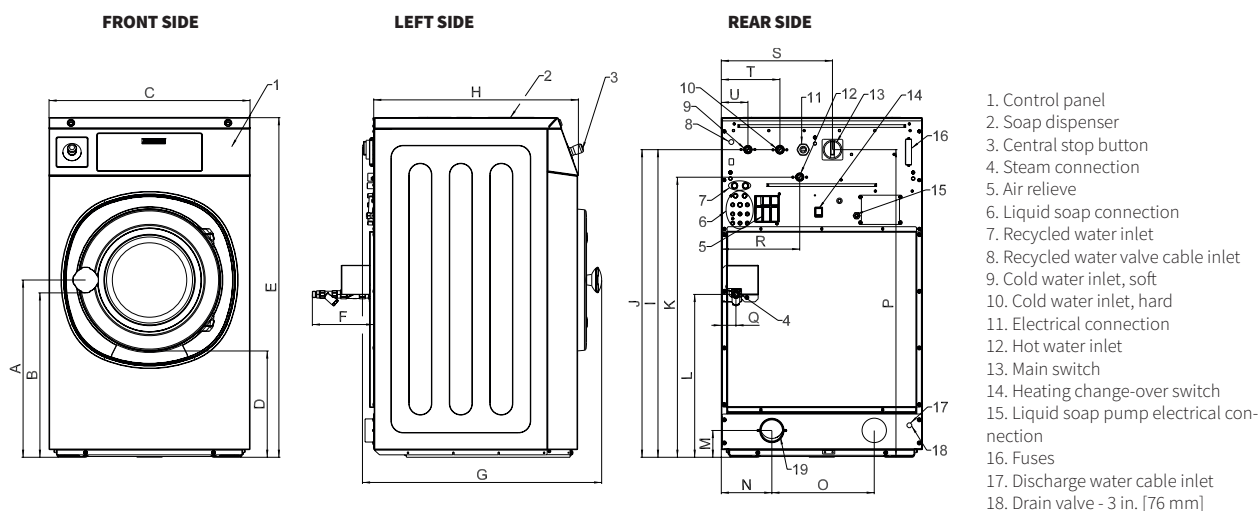

TYPE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	P	Q	R	S	T	U
UA 180	770	722	890	465	1410	120	915	816	1302	1282	1212	528	130	280	1304	54	303	530	218	113
UA 240	770	722	890	465	1410	120	1060	961	1302	1282	1212	528	130	280	1304	54	303	530	218	113
UA 280	770	722	890	465	1410	120	1135	1036	1302	1282	1212	528	130	280	1304	54	303	530	218	113
			width		height		depth													

TO LEARN MORE, OR TO FIND A DISTRIBUTOR IN YOUR AREA, VISIT UNIMAC.COM
ALLIANCE LAUNDRY SYSTEMS - SHEPARD ST, RIPON WI 54971 - +1 800 587 5458

Consult your UniMac® distributor for details. For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management systems at Alliance Laundry Systems® Ripon facility has been registered to ISO 9001:2008.

©2020 Alliance Laundry Systems LLC.

UniMac® by Alliance Laundry Systems