



Maximum Performance



UA332-520

FEATURES AND BENEFITS

- Rigid mounted, normal spin
- Stainless steel panels, drum and tub
- UniLinc Touch control - fully programmable
- Patented soap hopper
- High capacity water inlets
- Large drain valves (2 x Ø 76 mm)
- Easy access to all vital parts from the front
- Large door opening for easy loading & unloading


OPTIONS

- USB plug (on the back panel)
- Liquid soap connection
- Steam heating version
- Liquid soap pumps
- Water recovery kit
- 3rd water inlet
- ECO version : lower kW rating on request

HARDMOUNT WASHER-EXTRACTORS

TYPE		UA332	UA520
INNERDRUM			
Capacity 1:09	kg (lb)	37(82)	58(128)
Capacity 1:10	kg (lb)	33(73)	52(115)
Volume	litres	332	520
Diameter	mm	914	914
DRUM SPEED			
Wash	rpm	38	38
Extraction	rpm	540	440
G-FACTOR			
		150	100
HEATING			
Electricity	kW	27	40,6
Steam	bar	1 - 8	1 - 8
Hot water	°C	90	90
Sound pressure level	dB (A)	< 65	< 65
Water valves connection	BSP	3/4"	1"
Water pressure	kPa	100-800	100-800
Rec. water pressure	kPa	300-500	300-500
Water inlet	l/min	66-188	183-518
Drain valve	outer Ø mm	2x76	2x76
Flow amount with drain valve	l/min	2x210	2x210
Steam valve connection	BSP	3/4"	3/4"
Steam pressure	kPa	100-800	100-800
DIMENSIONS			
Size H×W×D	mm	1500×1060×1030	1500×1060×1315
Net weight	kg	410	520
TRANSPORT DATA			
Packed H×W×D	mm	1625×1088×1060	1625×1088×1345
Gross weight	kg	425	535
* 200 G-factor execution			

TYPE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	S	T
UA332	1060	1030	1500	936	465	318	120	1326	1366	113	248	383	671	1349	1413	528	66	145	482
UA520	1060	1315	1500	1221	465	318	120	1414	1374	88	223	363	671	1349	1332	528	66	145	482
	width	depth	height																

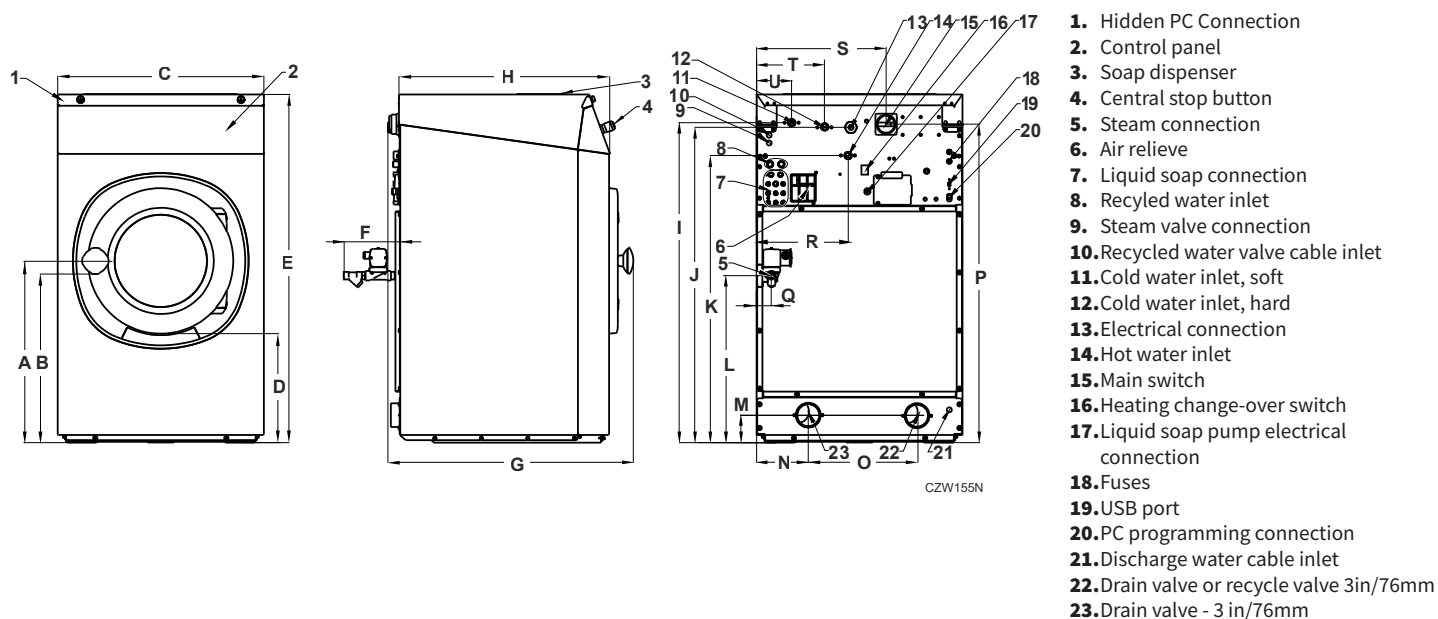

CONSULT YOUR SALES REPRESENTATIVE FOR AVAILABILITY

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications are subject to change without notice. www.unimac.com

UniMac by Alliance Laundry Systems